


TJ_AXXXXS-1WR2

1W 定电压输入, 隔离非稳压双路输出DC-DC电源模块

1W Fixed input, Isolation&Unregulated, Dual Output, DC-DC Converter

产品特性 Features


- ◆ 隔离电压 Isolation Voltage: 1500Vdc
- ◆ 工作环境温度 Temperature range: -40°C~+85°C
- ◆ 无需外加元件 No external component required
- ◆ 可持续短路保护 Continuous Short Circuit Protection
- ◆ 低纹波噪声 Low ripple and noise
- ◆ 小型SIP封装 Small SIP package
- ◆ 国际标准引脚 Industry standard pinout



产品列表 Product tabulates

产品型号 TYPE	输入电压(Vdc) Input voltage range	输出电压(Vdc) Output voltage	输出电流(mA) Output current	效率 Efficiency (%) (typ)
TJ_A0503S-1WR2	5 (4.5-5.5)	±33	±151	71
TJ_A0505S-1WR2		±5	±100	80
TJ_A0509S-1WR2		±9	±55	80
TJ_A0512S-1WR2		±12	±42	80
TJ_A0515S-1WR2		±15	±33	80
TJ_A0524S-1WR2	12 (10.8-13.2)	±24	±21	80
TJ_A1203S-1WR2		±33	±151	71
TJ_A1205S-1WR2		±5	±100	80
TJ_A1212S-1WR2		±12	±42	80
TJ_A1215S-1WR2		±15	±33	80
TJ_A2405S-1WR2	24 (21.6-26.4)	±5	±100	80
TJ_A2412S-1WR2		±12	±42	80
TJ_A2415S-1WR2		±15	±33	80

封装尺寸 Mechanical Data

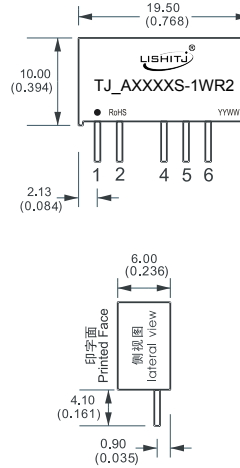

引脚功能(Function)

PIN	Function
1	Vin
2	GND
4	-Vo
5	0V
6	+Vo

尺寸单位(Size Unit): mm (inch)
 引脚(PIN): 0.50 (0.020) * 0.3 (0.012)
 PIN公差(Error): ±0.10 (±0.004)
 未标注公差: ±0.25 (±0.010)
 (Unmarked tolerances)

因篇幅有限, 以上只是部分产品列表, 若需列表以外产品, 请与本公司销售部联系。

Due to space limitations, the above list is only for some products, If demand for others not included in the tabulates, please contact the Company's sales department.


TJ_AXXXXS-2WR2

2W 定电压输入, 隔离非稳压双路输出DC-DC电源模块

2W Fixed input, Isolation&Unregulated, Dual Output, DC-DC Converter

产品特性 Features


- ◆ 隔离电压 Isolation Voltage: 1500Vdc
- ◆ 工作环境温度 Temperature range: -40°C~+85°C
- ◆ 无需外加元件 No external component required
- ◆ 可持续短路保护 Continuous Short Circuit Protection
- ◆ 低纹波噪声 Low ripple and noise
- ◆ 小型SIP封装 Small SIP package
- ◆ 国际标准引脚 Industry standard pinout

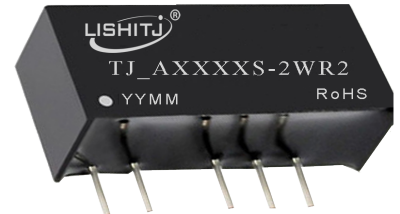

产品列表 Product tabulates

产品型号 TYPE	输入电压(Vdc) Input voltage range	输出电压(Vdc) Output voltage	输出电流(mA) Output current	效率 Efficiency (%) (typ)
TJ_A0503S-2WR2	5 (4.5-5.5)	±3.3	±200	71
TJ_A0505S-2WR2		±5	±200	80
TJ_A0509S-2WR2		±9	±111	80
TJ_A0512S-2WR2		±12	±83	80
TJ_A0515S-2WR2		±15	±67	80
TJ_A0524S-2WR2	12 (10.8-13.2)	±24	±42	80
TJ_A1203S-2WR2		±3.3	±200	71
TJ_A1205S-2WR2		±5	±200	80
TJ_A1212S-2WR2		±12	±83	80
TJ_A1215S-2WR2		±15	±67	80
TJ_A2405S-2WR2	24 (21.6-26.4)	±5	±200	80
TJ_A2412S-2WR2		±12	±83	80
TJ_A2415S-2WR2		±15	±67	80

封装尺寸 Mechanical Data

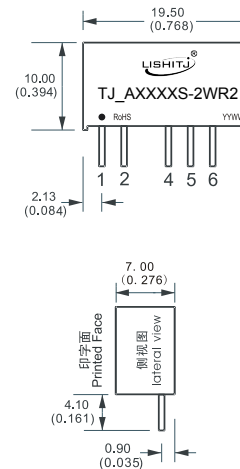

引脚功能(Function)

PIN	Function
1	Vin
2	GND
4	-Vo
5	0V
6	+Vo

尺寸单位(Size Unit): mm (inch)
 引脚(PIN): 0.50 (0.020) * 0.3 (0.012)
 PIN公差(Error): ±0.10 (±0.004)
 未标注公差: ±0.25 (±0.010)
 (Unmarked tolerances)

因篇幅有限, 以上只是部分产品列表, 若需列表以外产品, 请与本公司销售部联系。

Due to space limitations, the above list is only for some products, If demand for others not included in the tabulates, please contact the Company's sales department.